

Rooftop Package Series

Range: 076 to 480 MBH (6.3 to 40 TR)

60 Hz



High Capacity Packaged Units With Tropical Hermetic Compressor



Features / Benefits

- Statically and dynamically balanced belt driven Centrifugal, DIDW Forward Curved fan, designed for low sound operation.
- Motor pulleys are adjustable Speed Sheaves designed to allow changes to driven shaft speed where drive motor speed is fixed.
- Painted electro-static powder coat, zinc coated steel panels provide additional protection against rust and discoloration in areas with high UV factor.
- Cooling coils are built up of inner grooved copper tubes with mechanically bonded hydrophilic aluminum fins provide peak heat transfer.
- Standard factory installed thermostatic expansion valves (TXV).
- Standard sloped drain pan with 8 mm polyethylene insulation.
- Low resistance aluminum washable filters having frontal access for removal.
- Easy panel removal of side panel allows access to serviceable components.

The new series of Coolex Package Units air conditioner are designed and manufactured to provide comfort cooling for residential and commercial applications with the optimum performance, high efficiency, reliability, ease of service & maintenance and capable to operate at extremely ambient conditions up to 125°F.

For more technical information please visit www.coolex.com.kw



Responsible for developing Codes and Standards for
the HVAC/R industry.




Table of Contents

| | |
|---------------------------------|----|
| NOMENCLATURE | 2 |
| OUT STANDING FEATURES | 2 |
| STANDARD SPECIFICATIONS | 3 |
| MICROPROCESSOR BASED CONTROLLER | 4 |
| OPTIONAL SPECIFICATIONS | 4 |
| SELECTION PROCEDURE | 5 |
| GENERAL DATA | 6 |
| PERFORMANCE DATA TABLES | 8 |
| UNIT ELECTRICAL DATA | 12 |
| FAN PERFORMANCE | 14 |
| UNIT DIMENSIONS | 16 |
| LOAD DISTRIBUTION | 21 |
| TYPICAL WIRING DIAGRAMS | 22 |
| ABOUT RIC | 25 |
| COOLEX DISTRIBUTORS | 26 |

OTHER COOLEX PRODUCTS

1. **Air Cooled Screw Water Chillers**
2. **Air Cooled Scroll Water Chillers**
3. **Air Handling Units**
4. **Ducted Split Units**
5. **Concealed Split Units**
6. **Fan Coil Units**

NOMENCLATURE

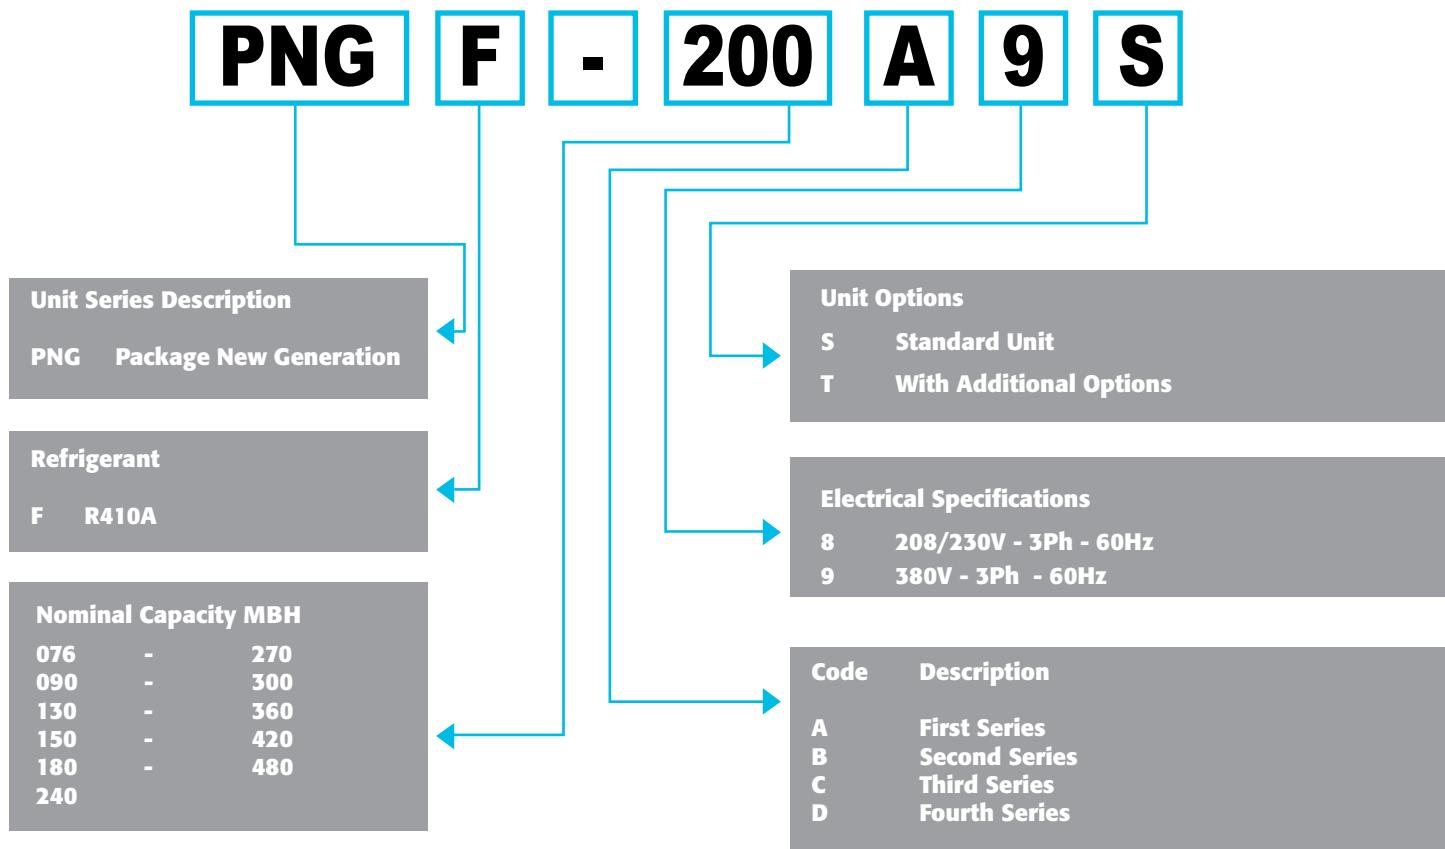

OUT STANDING FEATURES

Superior Efficiency

- High EER (Energy Efficiency Ratio) exceeds the new ASHRAE 90.1 efficiency levels
- Low power consumption
- High volumetric efficiency scroll compressors
- Designed to operate at severe ambient temperature up to 52°C without tripping

Quiet operation

- Low noise level compressors, condenser fans and evaporator blower
- Compact physical footprint

Controls

- Microprocessor Controller
- Single point power supply
- Color coded wires
- Weather proof Control panel

Quality Assurance

All units in the PNGF series are :

- Factory run tested.
- Produced in an ISO 9001-2015 listed manufacturing facility.
- Constructed in compliance with ASHRAE 15 safety requirements.
- AHRI rated cooling coils

STANDARD SPECIFICATIONS

General

- The Package New Generation Units are factory assembled cooling or combination of cooling and heating with electric heater, suitable for outdoor installation mounting on the roof or ground.
- The packaged unit consists of scroll compressors, cooling coil, condenser coil, fans, electric heater (optional), control wiring and interconnecting piping-all factory assembled.
- The units are rated in accordance with AHRI 340/360 standard.

Unit Casing

Panels are fabricated from hot dipped G90, Zinc coating and zero spangle galvanized steel, oven-baked powder coated. The unit is provided with an integral weather resistant control panel for outdoor application. Panels and access doors are provided for inspection and access for all internal parts.

Compressor

The compressors are hermetic scroll type provided with crankcase heater, internal pressure relief valve which provides high pressure protection to the refrigerant system and rubber vibration isolators for quiet and efficient operation. The compressors are equipped with internal motor protector for safe operation. The compressors are built to NF, VPE, CSA, & UL certification.

Evaporator Coils

The coils are built up of ripple finned seamless copper tubes and mechanically bonded to scientifically designed pre coated aluminum louvered fins. The assembled coils are factory leak tested under water at a pressure of 350 psig for quality and leak free units.

Condenser Coils

The coils are built up of ripple finned seamless copper tubes and mechanically bonded to scientifically designed pre coated aluminum louvered fins. The assembled coils are factory leak tested under water at a pressure of 700 psig for quality and leak free units.

Evaporator Fan

The units are provided with centrifugal forward curve fans which are statically and dynamically balanced belt driven, designed for low sound level operation

Evaporator Blower Motor

Motors are Open Drip Proof (ODP) type with class B insulation with permanently lubricated bearings and automatic thermal protection.

Condenser Fans

Condenser air fan is of the propeller type, aluminum blade with a direct drive motor upward discharge and provided with fan grille mounted in casing.

Condenser Fan Motor

Motors are totally enclosed air-over type with class F insulation for weather protection with permanently lubricated bearings and automatic thermal protection.

Drain Pan

The drain pan is fabricated of painted galvanized steel with insulation.

Air Filter

High dust holding capacity, low resistance filter. It consists of metal aluminum mesh with unique pattern and can be cleaned with regular water and prolonged use.

Refrigerant Circuit

PNGF series comes complete, as standard, with properly sized refrigerant lines including thermostatic expansion valve, sight glass, filter drier, automatic high and low pressure switch and full operating charge of R410A in each circuit.

Control Panel

The control panel enclosure is fabricated out of heavy gauge sheet steel powder coated bake finished. Internal power and control wiring is neatly routed, properly anchored and all wires are identified with cable markers as per NEC standard applicable to HVAC units. Major components used in the control panel are UL approved.

MICROPROCESSOR BASED CONTROLLER

The Package New Generation Units are provided with technologically advanced Microprocessor based controller, incorporating the following benefits and features:

- Anti-recycling timing device
- Compressor lock out function
- Balance loading of compressors
- Compressors lead-lag operation
- Pump down option
- Fault diagnostics
- Indicator lights for high & low pressure safety

OPTIONAL SPECIFICATIONS

Construction

- Double skin for evaporator side
- Anti-corrosion coating for coils
- Copper fins for evaporator and/or condenser
- Stainless steel drain pan
- Special Air filter material
- Filter box with High Efficiency Bag filters
- Sand trap louver

Electrical

- Electric heater
- Compressor circuit breaker
- Blower motor circuit breaker
- Condenser fan motor circuit breaker
- External overload for condenser fan motor
- *External overload for compressor
- TEFC Blower motor with Class F insulation
- Mild ambient kit
- Anti - ice thermostat
- Air flow switch
- Ultra violet light
- Modbus connectivity
- Wi-Fi Thermostat

Refrigeration

- Pump down kit
- Hot gas bypass kit
- High & Low Pressure gauges
- Rotalock valve for compressor
- Replaceable filter drier with mechanical shut-off valve
- Adjustable high/low pressure switch

Note : * For Models PNGF-076 TO 130 only.

Coolex App



Wi Fi Module



Typical Thermostat



SELECTION PROCEDURE

The below example illustrates the selection procedure to assist using this catalog to select the appropriate PNCF unit that meets the design requirements.

Example :

Design requirements

- Total cooling capacity 178 [MBH]
- Sensible cooling capacity 135 [MBH]
- Design ambient temperature 95 [°F]
- Evaporator air flow 5600 [CFM]
- Evaporator entering temperature DB/WB 80/67 [°F/°F]
- External static pressure 0.7 [in.wg]
- Altitude 1000 [ft]
- Power supply 380V /3Ph /60Hz

| Altitude [ft] | Correction factor |
|------------------|----------------------|
| Sea level | 1 |
| 1000 | 0.996 |
| 2000 | 0.990 |
| 3000 | 0.984 |
| 4000 | 0.980 |
| 5000 | 0.974 |
| 6000 | 0.965 |
| 7000 | 0.960 |

*Using the correction factor table at the specified altitude, thereby the required capacity will be:

From the cooling capacity at performance data tables (page 9), the closest selection model to the required capacity is PNCF-180. From the performance table:

Corrected capacity

$$= \text{Required capacity} \\ / \text{corr. factor}$$

Corrected total capacity

$$= 178 \text{ [MBH]} / 0.996 \\ = 178.7 \text{ MBH}$$

Total capacity

$$= 180.0 \text{ [MBH]}$$

Corrected sensible capacity

$$= 135 \text{ [MBH]} / 0.996 \\ = 135.5 \text{ MBH}$$

Sensible capacity

$$= 136.0 \text{ [MBH]}$$

GENERAL DATA

| Outdoor Units | | PNGF-076 | PNGF-090 | PNGF-130 | PNGF-0150 | PNGF-180 | PNGF-240 | | |
|-------------------------------|---------------------------------|--|----------|----------|-----------|----------|----------|--|--|
| Cooling Capacity (Nominal) | MBH | 74.0 | 88.0 | 126.0 | 150.0 | 180.0 | 240.0 | | |
| | KW | 21.6 | 25.8 | 36.9 | 44.0 | 53.0 | 70.5 | | |
| Power Supply | V / PH / HZ | 380 / 3 / 60 | | | | | | | |
| Evaporator Blower | Maximum Air Flow Rate (CFM) | 2600 | 2900 | 4000 | 4700 | 5600 | 7500 | | |
| | Type | Centrifugal Forward Curve Belt Driven | | | | | | | |
| | Motor Enclosure/Ins Class | Open Drip Proof, Class B | | | | | | | |
| | Nominal HP | 1 | 1.5 | 2 | 3 | 5 | | | |
| Evaporator Coil | Type | Hydrophilic Aluminum Fins & Inner Grooved Copper Tubes | | | | | | | |
| | Rows - FPI | 4-12 | 3-14 | 4-14 | 3-16 | 4-14 | 4-14 | | |
| | Total Face area ft ² | 6.1 | 9.8 | 9.8 | 12.0 | | 15.2 | | |
| Air Filter | Type | Washable aluminum mesh | | | | | | | |
| | Thickness (in) | 1 | | | 2 | | | | |
| Compressor | Type | Hermetic Scroll | | | | | | | |
| | Quantity | 1 | | | 2 | | | | |
| | Refrigerant | R410A | | | | | | | |
| | Refrigerant circuits | 1 | | | 2 | | | | |
| | Expansion device type | Thermostatic Expansion Valve | | | | | | | |
| Condenser Fan | Type | Propeller | | | | | | | |
| | No. of fans | 1 | | | 2 | | | | |
| | Motor Enclosure/Ins Class | Totally Enclosed Air Over Type , Class F | | | | | | | |
| | Nominal HP x Qty | 1.0 X 1 | 2.2 x 1 | 1.0 X 2 | 2.2 x 2 | | | | |
| Condenser Coil | Type | Enhanced Aluminum Fins & Copper Tubes | | | | | | | |
| | Rows - FPI | 3-14 | 2-16 | 3-16 | 3-16 | 3-16 | 4-16 | | |
| | Total Face area ft ² | 16.3 | 21.7 | 22.7 | 31.6 | 31.6 | 38.6 | | |
| Weight | kg | 232 | 300 | 410 | 610 | 657 | 810 | | |

Note:

1. Cooling capacities are based on 80°/67°F Evaporating air temperature and 95° Condensing air temperature
2. The above data maybe changed without prior notice due to continuous improvement in quality and performance.

GENERAL DATA

| Outdoor Units | | PNGF-270 | PNGF-300 | PNGF-360 | PNGF-420 | PNGF-480 | |
|-------------------------------|---------------------------------|--|----------|----------|----------|----------|--|
| Cooling Capacity (Nominal) | MBH | 266.0 | 296.0 | 352.0 | 414.0 | 472.0 | |
| | KW | 78.0 | 87.0 | 103.0 | 121.5 | 138.5 | |
| Power Supply | V / PH / HZ | 380 / 3 / 60 | | | | | |
| Evaporator Blower | Maximum Air Flow Rate (CFM) | 8400 | 9400 | 10800 | 12200 | 13800 | |
| | Type | Centrifugal Forward Curve Belt Driven | | | | | |
| | Motor Enclosure/Ins Class | Open Drip Proof, Class B | | | | | |
| | Nominal HP | 5 | | 7.5 | | 10 | |
| Evaporator Coil | Type | Hydrophilic Aluminum Fins & Inner Grooved Copper Tubes | | | | | |
| | Rows - FPI | 4-14 | 4-13 | 4-13 | 4-16 | 4-14 | |
| | Total Face area ft ² | 17.5 | 22.0 | 22.0 | 26.0 | 29.2 | |
| Air Filter | Type | Washable aluminum mesh | | | | | |
| | Thickness (in) | 2 | | | | | |
| Compressor | Type | Hermetic Scroll | | | | | |
| | Quantity | 2 | | | 4 | | |
| | Refrigerant | R410A | | | | | |
| | Refrigerant circuits | 2 | | | 4 | | |
| | Expansion device type | Thermostatic Expansion Valve | | | | | |
| Condenser Fan | Type | Propeller | | | | | |
| | No. of fans | 2 | | | 4 | | |
| | Motor Enclosure/Ins Class | Totally Enclosed Air Over Type , Class F | | | | | |
| | Nominal HP x Qty | 2.2 x 2 | | 2.7 x 2 | 2.2 x 4 | | |
| Condenser Coil | Type | Enhanced Aluminum Fins & Copper Tubes | | | | | |
| | Rows - FPI | 4-16 | 4-14 | | 3-14 | | |
| | Total Face area ft ² | 42.4 | 53.0 | | 79.2 | | |
| Weight | kg | 1008 | 1074 | 1383 | 1560 | 1668 | |

Note:

1. Cooling capacities are based on 80°/67°F Evaporating air temperature and 95° Condensing air temperature
2. The above data maybe changed without prior notice due to continuous improvement in quality and performance.

PERFORMANCE DATA TABLES

| Model | Air Flow | Condenser Ambient Temperature [°F] | | | | | | | | | | | | | |
|----------|----------|------------------------------------|----|-----------------|--------|----------|-----------------|--------|----------|-----------------|--------|----------|---------|--------|-------|
| | | Air Flow | | 95 | | 115 | | 118.4 | | 125 | | | | | |
| | CFM | DB | WB | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | | | |
| | | | | Total | Sen. | | Total | Sen. | | Total | Sen. | | Total | Sen. | |
| PNGF-076 | 2200 | 86 | 72 | 76,702 | 53,841 | 6.44 | 68,921 | 50,840 | 7.79 | 67,620 | 50,345 | 8.03 | 64,816 | 49,287 | 8.47 |
| | | 80 | 67 | 71,351 | 52,528 | 6.40 | 64,113 | 49,600 | 7.74 | 62,902 | 49,117 | 7.98 | 60,294 | 48,085 | 8.42 |
| | | 74 | 62 | 64,929 | 50,952 | 6.35 | 58,343 | 48,112 | 7.68 | 57,241 | 47,643 | 7.92 | 54,868 | 46,642 | 8.35 |
| | | 68 | 57 | 59,578 | 49,166 | 6.21 | 53,534 | 46,426 | 7.50 | 52,523 | 45,974 | 7.74 | 50,345 | 45,008 | 8.16 |
| | 2400 | 86 | 72 | 77,658 | 56,165 | 6.45 | 69,798 | 53,178 | 7.81 | 68,329 | 52,628 | 8.04 | 65,564 | 51,601 | 8.48 |
| | | 80 | 67 | 72,240 | 54,795 | 6.41 | 64,928 | 51,881 | 7.76 | 63,562 | 51,344 | 7.99 | 60,990 | 50,342 | 8.43 |
| | | 74 | 62 | 65,738 | 53,151 | 6.36 | 59,084 | 50,325 | 7.70 | 57,841 | 49,804 | 7.93 | 55,501 | 48,832 | 8.36 |
| | | 68 | 57 | 60,320 | 51,288 | 6.22 | 54,215 | 48,561 | 7.52 | 53,074 | 48,058 | 7.75 | 50,927 | 47,120 | 8.17 |
| | 2600 | 86 | 72 | 78,053 | 58,416 | 6.46 | 70,386 | 55,405 | 7.83 | 69,018 | 54,900 | 8.05 | 66,242 | 53,880 | 8.49 |
| | | 80 | 67 | 74,000 | 57,000 | 6.42 | 66,000 | 54,000 | 7.78 | 64,203 | 53,561 | 8.00 | 61,620 | 52,566 | 8.44 |
| | | 74 | 62 | 66,481 | 55,450 | 6.38 | 59,582 | 52,432 | 7.72 | 58,425 | 51,954 | 7.94 | 56,074 | 50,989 | 8.37 |
| | | 68 | 57 | 61,101 | 53,624 | 6.35 | 54,672 | 50,595 | 7.54 | 53,610 | 50,133 | 7.75 | 51,453 | 49,202 | 8.18 |
| PNGF-090 | 2300 | 86 | 72 | 87,229 | 61,344 | 7.91 | 78,743 | 58,016 | 9.47 | 77,302 | 57,461 | 9.62 | 74,443 | 56,365 | 10.21 |
| | | 80 | 67 | 82,369 | 59,906 | 7.76 | 74,356 | 56,656 | 9.28 | 72,995 | 56,114 | 9.43 | 70,296 | 55,044 | 10.00 |
| | | 74 | 62 | 74,297 | 58,229 | 7.63 | 67,069 | 55,070 | 9.11 | 65,841 | 54,543 | 9.26 | 63,407 | 53,503 | 9.81 |
| | | 68 | 57 | 68,284 | 56,312 | 7.52 | 61,641 | 53,257 | 8.97 | 60,513 | 52,747 | 9.11 | 58,275 | 51,741 | 9.65 |
| | 2600 | 86 | 72 | 88,713 | 64,982 | 7.91 | 80,019 | 61,649 | 9.48 | 78,475 | 61,066 | 9.63 | 75,631 | 59,998 | 10.22 |
| | | 80 | 67 | 83,771 | 63,459 | 7.77 | 75,561 | 60,204 | 9.29 | 74,103 | 59,635 | 9.44 | 71,417 | 58,592 | 10.01 |
| | | 74 | 62 | 75,561 | 61,682 | 7.64 | 68,156 | 58,518 | 9.12 | 66,841 | 57,965 | 9.27 | 64,418 | 56,951 | 9.82 |
| | | 68 | 57 | 69,446 | 59,651 | 7.53 | 62,640 | 56,592 | 8.98 | 61,431 | 56,057 | 9.12 | 59,205 | 55,076 | 9.66 |
| | 2900 | 86 | 72 | 93,582 | 69,959 | 7.93 | 84,197 | 66,394 | 9.49 | 82,552 | 65,779 | 9.64 | 79,385 | 64,600 | 10.23 |
| | | 80 | 67 | 88,000 | 68,000 | 7.78 | 80,000 | 65,000 | 9.30 | 77,953 | 64,237 | 9.45 | 74,962 | 63,086 | 10.02 |
| | | 74 | 62 | 79,708 | 66,406 | 7.65 | 71,714 | 63,023 | 9.13 | 70,314 | 62,438 | 9.28 | 67,616 | 61,320 | 9.83 |
| | | 68 | 57 | 73,257 | 64,220 | 7.54 | 65,910 | 60,948 | 8.98 | 64,623 | 60,383 | 9.13 | 62,143 | 59,301 | 9.67 |
| PNGF-130 | 3200 | 86 | 72 | 131,773 | 89,122 | 11.16 | 117,786 | 82,872 | 13.18 | 115,800 | 82,118 | 13.54 | 111,446 | 80,471 | 14.35 |
| | | 80 | 67 | 121,674 | 87,374 | 10.95 | 108,759 | 81,247 | 12.92 | 106,925 | 80,508 | 13.26 | 102,905 | 78,893 | 14.05 |
| | | 74 | 62 | 112,062 | 85,015 | 10.76 | 100,167 | 79,053 | 12.68 | 98,478 | 78,334 | 13.02 | 94,776 | 76,763 | 13.79 |
| | | 68 | 57 | 103,180 | 82,219 | 10.59 | 92,228 | 76,453 | 12.47 | 90,672 | 75,758 | 12.80 | 87,263 | 74,238 | 13.55 |
| | 3600 | 86 | 72 | 133,764 | 93,588 | 11.19 | 119,426 | 87,223 | 13.21 | 117,402 | 86,468 | 13.56 | 112,968 | 84,823 | 14.37 |
| | | 80 | 67 | 123,513 | 91,753 | 10.98 | 110,273 | 85,513 | 12.94 | 108,404 | 84,773 | 13.28 | 104,310 | 83,160 | 14.07 |
| | | 74 | 62 | 113,755 | 89,276 | 10.79 | 101,561 | 83,204 | 12.71 | 99,840 | 82,484 | 13.04 | 96,070 | 80,915 | 13.81 |
| | | 68 | 57 | 104,739 | 86,340 | 10.62 | 93,512 | 80,468 | 12.49 | 91,927 | 79,771 | 12.81 | 88,455 | 78,254 | 13.57 |
| | 4000 | 86 | 72 | 136,000 | 99,091 | 11.23 | 121,282 | 92,587 | 13.23 | 118,998 | 91,752 | 13.59 | 114,561 | 90,136 | 14.40 |
| | | 80 | 67 | 126,000 | 97,000 | 11.01 | 112,000 | 91,000 | 12.97 | 109,878 | 89,953 | 13.31 | 105,781 | 88,369 | 14.10 |
| | | 74 | 62 | 115,657 | 94,525 | 10.82 | 103,140 | 88,321 | 12.73 | 101,198 | 87,524 | 13.07 | 97,424 | 85,983 | 13.84 |
| | | 68 | 57 | 106,490 | 91,416 | 10.65 | 94,965 | 85,416 | 12.51 | 93,177 | 84,646 | 12.84 | 89,702 | 83,155 | 13.60 |

See note on page 11

PERFORMANCE DATA TABLES

| Model | Air Flow | Condenser Ambient Temperature [°F] | | | | | | | | | | | | | |
|----------|----------|------------------------------------|----|-----------------|---------|----------|-----------------|---------|----------|-----------------|---------|----------|---------|---------|-------|
| | | Air Flow | | 95 | | 115 | | 118.4 | | 125 | | | | | |
| | CFM | DB | WB | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | | | |
| | | | | Total | Sen. | | Total | Sen. | | Total | Sen. | | Total | Sen. | |
| PNGF-150 | 3900 | 86 | 72 | 156,767 | 105,751 | 13.17 | 140,906 | 99,588 | 15.65 | 138,115 | 98,522 | 15.92 | 131,645 | 96,068 | 16.86 |
| | | 80 | 67 | 144,353 | 103,172 | 13.11 | 129,748 | 97,159 | 15.58 | 127,178 | 96,119 | 15.85 | 121,220 | 93,725 | 16.78 |
| | | 74 | 62 | 132,372 | 100,180 | 13.05 | 118,979 | 94,341 | 15.51 | 116,622 | 93,332 | 15.78 | 111,159 | 91,007 | 16.70 |
| | | 68 | 57 | 121,257 | 96,672 | 13.02 | 108,988 | 91,038 | 15.46 | 106,830 | 90,064 | 15.73 | 101,825 | 87,820 | 16.65 |
| | 4300 | 86 | 72 | 159,088 | 110,419 | 13.18 | 142,846 | 104,216 | 15.66 | 139,892 | 103,105 | 15.93 | 133,977 | 100,897 | 16.87 |
| | | 80 | 67 | 146,490 | 107,726 | 13.12 | 131,534 | 101,674 | 15.59 | 128,814 | 100,590 | 15.86 | 123,367 | 98,436 | 16.79 |
| | | 74 | 62 | 134,331 | 104,602 | 13.06 | 120,617 | 98,725 | 15.52 | 118,122 | 97,673 | 15.79 | 113,128 | 95,581 | 16.71 |
| | | 68 | 57 | 123,052 | 100,939 | 13.03 | 110,489 | 95,269 | 15.47 | 108,204 | 94,253 | 15.74 | 103,628 | 92,235 | 16.66 |
| | 4700 | 86 | 72 | 161,132 | 114,994 | 13.19 | 144,426 | 108,707 | 15.67 | 141,433 | 107,597 | 15.94 | 135,571 | 105,438 | 16.88 |
| | | 80 | 67 | 150,000 | 112,000 | 13.13 | 134,000 | 106,000 | 15.60 | 130,233 | 104,973 | 15.87 | 124,835 | 102,866 | 16.80 |
| | | 74 | 62 | 136,057 | 108,936 | 13.07 | 121,951 | 102,980 | 15.53 | 119,424 | 101,929 | 15.80 | 114,474 | 99,883 | 16.72 |
| | | 68 | 57 | 124,632 | 105,121 | 13.04 | 111,711 | 99,374 | 15.48 | 109,396 | 98,360 | 15.75 | 104,861 | 96,385 | 16.67 |
| PNGF-180 | 4600 | 86 | 72 | 180,261 | 123,388 | 15.72 | 162,404 | 116,613 | 17.91 | 159,234 | 115,429 | 18.23 | 152,874 | 113,072 | 19.33 |
| | | 80 | 67 | 165,986 | 120,379 | 15.65 | 149,543 | 113,769 | 17.83 | 146,624 | 112,614 | 18.14 | 140,768 | 110,314 | 19.24 |
| | | 74 | 62 | 152,209 | 116,888 | 15.58 | 137,131 | 110,470 | 17.75 | 134,454 | 109,348 | 18.05 | 129,084 | 107,115 | 19.15 |
| | | 68 | 57 | 139,428 | 112,795 | 15.53 | 125,616 | 106,602 | 17.69 | 123,164 | 105,519 | 18.00 | 118,245 | 103,364 | 19.08 |
| | 5100 | 86 | 72 | 182,830 | 129,249 | 15.78 | 164,247 | 122,322 | 17.97 | 161,098 | 121,166 | 18.28 | 154,708 | 118,835 | 19.39 |
| | | 80 | 67 | 168,352 | 126,097 | 15.71 | 151,240 | 119,339 | 17.88 | 148,341 | 118,211 | 18.19 | 142,457 | 115,937 | 19.30 |
| | | 74 | 62 | 154,379 | 122,440 | 15.64 | 138,687 | 115,878 | 17.79 | 136,029 | 114,783 | 18.10 | 130,633 | 112,575 | 19.21 |
| | | 68 | 57 | 141,416 | 118,153 | 15.59 | 127,042 | 111,821 | 17.74 | 124,606 | 110,764 | 18.05 | 119,664 | 108,633 | 19.14 |
| | 5600 | 86 | 72 | 194,194 | 139,127 | 15.88 | 166,056 | 128,017 | 18.02 | 162,890 | 126,871 | 18.34 | 156,182 | 124,458 | 19.44 |
| | | 80 | 67 | 180,000 | 136,000 | 15.81 | 154,000 | 125,000 | 17.93 | 149,991 | 123,777 | 18.25 | 143,814 | 121,422 | 19.35 |
| | | 74 | 62 | 163,974 | 131,798 | 15.74 | 140,215 | 121,273 | 17.84 | 137,542 | 120,187 | 18.16 | 131,877 | 117,901 | 19.26 |
| | | 68 | 57 | 150,205 | 127,183 | 15.69 | 128,441 | 117,027 | 17.79 | 125,992 | 115,979 | 18.10 | 120,804 | 113,772 | 19.19 |
| PNGF-240 | 6500 | 86 | 72 | 246,619 | 166,921 | 21.25 | 222,652 | 157,633 | 25.24 | 218,403 | 156,013 | 26.08 | 209,552 | 152,662 | 27.62 |
| | | 80 | 67 | 227,089 | 162,850 | 21.16 | 205,020 | 153,788 | 25.13 | 201,108 | 152,208 | 25.97 | 192,958 | 148,939 | 27.50 |
| | | 74 | 62 | 208,241 | 158,127 | 21.07 | 188,003 | 149,328 | 25.02 | 184,416 | 147,794 | 25.86 | 176,942 | 144,620 | 27.38 |
| | | 68 | 57 | 190,755 | 152,590 | 21.02 | 172,217 | 144,099 | 24.95 | 168,931 | 142,619 | 25.78 | 162,085 | 139,556 | 27.29 |
| | 7000 | 86 | 72 | 251,102 | 176,688 | 21.32 | 226,391 | 167,324 | 25.32 | 222,046 | 165,704 | 26.15 | 213,003 | 162,350 | 27.70 |
| | | 80 | 67 | 231,217 | 172,379 | 21.23 | 208,463 | 163,243 | 25.21 | 204,462 | 161,662 | 26.04 | 196,135 | 158,390 | 27.58 |
| | | 74 | 62 | 212,026 | 167,380 | 21.14 | 191,161 | 158,509 | 25.10 | 187,492 | 156,974 | 25.93 | 179,856 | 153,797 | 27.46 |
| | | 68 | 57 | 194,222 | 161,519 | 21.09 | 175,109 | 152,959 | 25.03 | 171,748 | 151,477 | 25.85 | 164,753 | 148,411 | 27.37 |
| | 7500 | 86 | 72 | 253,046 | 183,133 | 21.39 | 229,635 | 176,840 | 25.38 | 225,014 | 175,143 | 26.21 | 215,789 | 171,778 | 27.76 |
| | | 80 | 67 | 240,000 | 179,000 | 21.30 | 211,450 | 172,527 | 25.27 | 207,195 | 170,871 | 26.10 | 198,701 | 167,588 | 27.64 |
| | | 74 | 62 | 213,667 | 173,485 | 21.21 | 193,900 | 167,524 | 25.16 | 189,998 | 165,916 | 25.99 | 182,209 | 162,728 | 27.52 |
| | | 68 | 57 | 195,726 | 167,410 | 21.16 | 177,618 | 161,658 | 25.09 | 174,044 | 160,106 | 25.91 | 166,909 | 157,030 | 27.43 |

See note on page 11

PERFORMANCE DATA TABLES

| Model | Air Flow | Condenser Ambient Temperature [°F] | | | | | | | | | | | | | |
|----------|----------|------------------------------------|----|-----------------|---------|----------|-----------------|---------|----------|-----------------|---------|----------|---------|---------|-------|
| | | Air Flow | | 95 | | 115 | | 118.4 | | 125 | | | | | |
| | CFM | DB | WB | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | | | |
| | | | | Total | Sen. | | Total | Sen. | | Total | Sen. | | Total | Sen. | |
| PNGF-270 | 7400 | 86 | 72 | 277,758 | 185,717 | 25.14 | 249,262 | 174,599 | 29.00 | 244,216 | 172,665 | 29.89 | 233,606 | 168,632 | 31.60 |
| | | 80 | 67 | 255,762 | 181,187 | 25.03 | 229,523 | 170,340 | 28.87 | 224,877 | 168,454 | 29.75 | 215,107 | 164,519 | 31.45 |
| | | 74 | 62 | 234,534 | 175,933 | 24.92 | 210,473 | 165,400 | 28.74 | 206,212 | 163,569 | 29.61 | 197,253 | 159,748 | 31.30 |
| | | 68 | 57 | 214,840 | 169,772 | 24.85 | 192,799 | 159,609 | 28.65 | 188,897 | 157,841 | 29.52 | 180,690 | 154,154 | 31.21 |
| | 7900 | 86 | 72 | 281,996 | 195,011 | 25.23 | 252,889 | 183,898 | 29.09 | 247,737 | 181,962 | 29.97 | 236,786 | 177,875 | 31.68 |
| | | 80 | 67 | 259,665 | 190,255 | 25.12 | 232,863 | 179,413 | 28.96 | 228,119 | 177,524 | 29.83 | 218,035 | 173,537 | 31.53 |
| | | 74 | 62 | 238,113 | 184,738 | 25.01 | 213,535 | 174,210 | 28.83 | 209,185 | 172,376 | 29.69 | 199,938 | 168,504 | 31.38 |
| | | 68 | 57 | 218,119 | 178,269 | 24.94 | 195,605 | 168,110 | 28.74 | 191,620 | 166,340 | 29.60 | 183,149 | 162,604 | 31.28 |
| | 8400 | 86 | 72 | 289,120 | 205,006 | 25.39 | 255,563 | 192,357 | 29.15 | 250,446 | 190,463 | 30.04 | 239,385 | 186,402 | 31.75 |
| | | 80 | 67 | 266,600 | 200,000 | 25.28 | 236,000 | 188,000 | 29.02 | 230,613 | 185,818 | 29.90 | 220,428 | 181,856 | 31.60 |
| | | 74 | 62 | 244,128 | 194,206 | 25.17 | 215,793 | 182,223 | 28.89 | 211,472 | 180,429 | 29.76 | 202,132 | 176,582 | 31.45 |
| | | 68 | 57 | 223,629 | 187,406 | 25.10 | 197,673 | 175,842 | 28.80 | 193,715 | 174,111 | 29.67 | 185,160 | 170,399 | 31.35 |
| PNGF-300 | 8200 | 86 | 72 | 310,338 | 210,621 | 27.44 | 287,413 | 201,728 | 31.68 | 281,360 | 199,408 | 32.41 | 269,590 | 194,939 | 34.24 |
| | | 80 | 67 | 285,762 | 205,484 | 27.32 | 264,653 | 196,808 | 31.53 | 259,079 | 194,545 | 32.26 | 248,242 | 190,184 | 34.08 |
| | | 74 | 62 | 262,044 | 199,525 | 27.20 | 242,687 | 191,100 | 31.38 | 237,576 | 188,903 | 32.11 | 227,638 | 184,669 | 33.92 |
| | | 68 | 57 | 240,040 | 192,538 | 27.12 | 222,309 | 184,409 | 31.28 | 217,626 | 182,289 | 32.01 | 208,523 | 178,203 | 33.81 |
| | 8800 | 86 | 72 | 315,719 | 222,935 | 27.56 | 292,547 | 214,150 | 31.76 | 286,173 | 211,761 | 32.50 | 273,677 | 207,111 | 34.32 |
| | | 80 | 67 | 290,717 | 217,498 | 27.44 | 269,380 | 208,926 | 31.61 | 263,511 | 206,596 | 32.35 | 252,004 | 202,060 | 34.16 |
| | | 74 | 62 | 266,588 | 211,191 | 27.32 | 247,022 | 202,868 | 31.46 | 241,639 | 200,604 | 32.20 | 231,088 | 196,200 | 34.00 |
| | | 68 | 57 | 244,202 | 203,796 | 27.24 | 226,279 | 195,764 | 31.36 | 221,349 | 193,580 | 32.10 | 211,684 | 189,330 | 33.89 |
| | 9400 | 86 | 72 | 320,238 | 234,985 | 27.66 | 296,383 | 226,109 | 31.83 | 290,108 | 223,799 | 32.57 | 277,284 | 219,109 | 34.39 |
| | | 80 | 67 | 296,000 | 229,000 | 27.54 | 274,000 | 221,000 | 31.68 | 267,135 | 218,340 | 32.42 | 255,326 | 213,765 | 34.23 |
| | | 74 | 62 | 270,404 | 222,605 | 27.42 | 250,260 | 214,197 | 31.53 | 244,962 | 212,008 | 31.99 | 234,134 | 207,566 | 33.77 |
| | | 68 | 57 | 247,698 | 214,810 | 27.33 | 229,246 | 206,696 | 31.43 | 224,393 | 204,585 | 31.48 | 214,473 | 200,298 | 33.22 |
| PNGF-360 | 9600 | 86 | 72 | 373,309 | 258,371 | 33.19 | 335,250 | 243,858 | 38.47 | 328,917 | 241,484 | 39.86 | 316,208 | 236,750 | 42.34 |
| | | 80 | 67 | 343,747 | 252,069 | 33.05 | 308,702 | 237,911 | 38.30 | 302,870 | 235,594 | 39.68 | 291,168 | 230,975 | 42.14 |
| | | 74 | 62 | 315,216 | 244,759 | 32.91 | 283,080 | 231,011 | 38.13 | 277,732 | 228,762 | 39.50 | 267,001 | 224,277 | 41.94 |
| | | 68 | 57 | 288,748 | 236,189 | 32.81 | 259,310 | 222,922 | 38.01 | 254,411 | 220,752 | 39.38 | 244,581 | 216,424 | 41.81 |
| | 10200 | 86 | 72 | 378,111 | 270,766 | 33.29 | 339,834 | 256,437 | 38.58 | 332,833 | 253,853 | 39.96 | 319,924 | 249,125 | 42.45 |
| | | 80 | 67 | 348,168 | 264,162 | 33.15 | 312,923 | 250,183 | 38.41 | 306,476 | 247,661 | 39.78 | 294,590 | 243,049 | 42.25 |
| | | 74 | 62 | 319,270 | 256,502 | 33.01 | 286,950 | 242,927 | 38.24 | 281,038 | 240,479 | 39.60 | 270,139 | 236,001 | 42.05 |
| | | 68 | 57 | 292,461 | 247,520 | 32.92 | 262,855 | 234,421 | 38.12 | 257,440 | 232,058 | 39.48 | 247,455 | 227,737 | 41.92 |
| | 10800 | 86 | 72 | 382,572 | 283,097 | 33.39 | 343,222 | 268,589 | 38.67 | 336,338 | 266,085 | 40.05 | 323,050 | 261,306 | 42.54 |
| | | 80 | 67 | 352,000 | 276,000 | 33.25 | 316,000 | 262,000 | 38.50 | 309,704 | 259,596 | 39.87 | 297,468 | 254,932 | 42.34 |
| | | 74 | 62 | 323,038 | 268,183 | 33.11 | 289,811 | 254,439 | 38.33 | 283,998 | 252,067 | 39.36 | 272,778 | 247,539 | 41.78 |
| | | 68 | 57 | 295,912 | 258,792 | 33.01 | 265,476 | 245,529 | 38.21 | 260,151 | 243,241 | 38.75 | 249,873 | 238,872 | 41.13 |

See note on page 11

PERFORMANCE DATA TABLES

| Model | Air Flow | Condenser Ambient Temperature [°F] | | | | | | | | | | | | | |
|----------|----------|------------------------------------|----|-----------------|---------|----------|-----------------|---------|----------|-----------------|---------|----------|---------|---------|-------|
| | | Air Flow | | 95 | | 115 | | 118.4 | | 125 | | | | | |
| | CFM | DB | WB | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | Capacity Btu/Hr | | kW Input | | | |
| | | | | Total | Sen. | | Total | Sen. | | Total | Sen. | | Total | Sen. | |
| PNGF-420 | 11000 | 86 | 72 | 437,268 | 293,416 | 39.38 | 394,887 | 276,925 | 45.78 | 387,544 | 274,114 | 47.47 | 372,570 | 268,425 | 50.33 |
| | | 80 | 67 | 402,641 | 286,260 | 39.22 | 363,616 | 270,170 | 45.58 | 356,855 | 267,428 | 47.26 | 343,066 | 261,878 | 50.10 |
| | | 74 | 62 | 369,222 | 277,958 | 39.06 | 333,436 | 262,335 | 45.38 | 327,236 | 259,673 | 47.05 | 314,592 | 254,284 | 49.87 |
| | | 68 | 57 | 338,218 | 268,225 | 38.95 | 305,437 | 253,150 | 45.25 | 299,758 | 250,580 | 46.91 | 288,175 | 245,380 | 49.72 |
| | 11600 | 86 | 72 | 444,595 | 308,510 | 39.50 | 400,769 | 291,805 | 45.90 | 393,135 | 288,941 | 47.58 | 377,836 | 283,257 | 50.45 |
| | | 80 | 67 | 409,388 | 300,986 | 39.34 | 369,033 | 284,687 | 45.70 | 362,003 | 281,893 | 47.37 | 347,916 | 276,348 | 50.22 |
| | | 74 | 62 | 375,409 | 292,257 | 39.18 | 338,403 | 276,431 | 45.50 | 331,957 | 273,719 | 47.16 | 319,039 | 268,334 | 49.99 |
| | | 68 | 57 | 343,886 | 282,023 | 39.07 | 309,987 | 266,752 | 45.36 | 304,082 | 264,134 | 47.02 | 292,249 | 258,938 | 49.84 |
| | 12200 | 86 | 72 | 450,333 | 322,419 | 39.60 | 405,744 | 305,704 | 46.00 | 397,724 | 302,740 | 47.67 | 381,954 | 296,951 | 50.54 |
| | | 80 | 67 | 414,000 | 315,000 | 39.43 | 374,000 | 298,000 | 45.80 | 366,229 | 295,356 | 47.46 | 351,708 | 289,708 | 50.31 |
| | | 74 | 62 | 380,254 | 305,433 | 39.27 | 342,604 | 289,599 | 45.60 | 335,832 | 286,790 | 47.25 | 322,516 | 281,307 | 50.08 |
| | | 68 | 57 | 348,324 | 294,738 | 39.16 | 313,835 | 279,459 | 45.46 | 307,632 | 276,748 | 47.11 | 295,434 | 271,457 | 49.93 |
| PNGF-480 | 12400 | 86 | 72 | 497,915 | 330,518 | 45.04 | 450,943 | 312,075 | 52.82 | 442,777 | 308,922 | 54.35 | 426,155 | 302,550 | 58.45 |
| | | 80 | 67 | 458,485 | 322,456 | 44.85 | 415,233 | 304,463 | 52.59 | 407,713 | 301,387 | 54.11 | 392,408 | 295,171 | 58.18 |
| | | 74 | 62 | 420,431 | 313,105 | 44.66 | 380,769 | 295,634 | 52.36 | 373,873 | 292,647 | 53.87 | 359,838 | 286,611 | 57.91 |
| | | 68 | 57 | 385,128 | 302,142 | 44.54 | 348,796 | 285,282 | 52.20 | 342,479 | 282,400 | 53.71 | 329,622 | 276,575 | 57.74 |
| | 13100 | 86 | 72 | 505,649 | 345,131 | 45.15 | 457,152 | 326,440 | 52.92 | 448,632 | 323,207 | 54.44 | 431,306 | 316,681 | 58.55 |
| | | 80 | 67 | 465,607 | 336,713 | 44.96 | 420,950 | 318,478 | 52.69 | 413,105 | 315,324 | 54.20 | 397,151 | 308,957 | 58.28 |
| | | 74 | 62 | 426,961 | 326,949 | 44.77 | 386,011 | 309,243 | 52.46 | 378,818 | 306,179 | 53.96 | 364,187 | 299,997 | 58.01 |
| | | 68 | 57 | 391,110 | 315,500 | 44.65 | 353,598 | 298,414 | 52.30 | 347,008 | 295,458 | 53.80 | 333,607 | 289,492 | 57.84 |
| | 13800 | 86 | 72 | 511,852 | 358,601 | 45.24 | 462,619 | 339,912 | 53.01 | 453,628 | 336,550 | 54.52 | 436,458 | 330,168 | 58.63 |
| | | 80 | 67 | 472,000 | 350,000 | 45.05 | 426,000 | 332,000 | 52.78 | 417,705 | 328,341 | 54.28 | 401,895 | 322,115 | 58.36 |
| | | 74 | 62 | 432,199 | 339,709 | 44.86 | 390,628 | 322,004 | 52.54 | 383,036 | 318,819 | 53.60 | 368,538 | 312,774 | 57.60 |
| | | 68 | 57 | 395,907 | 327,814 | 44.74 | 357,827 | 310,729 | 52.39 | 350,873 | 307,656 | 52.79 | 337,592 | 301,822 | 56.72 |

LEGEND:

- CFM : Air flow rate (Ft³/minute)
- DB : Dry bulb temperature (°F)
- WB : Wet bulb temperature (°F)
- KW : Total Power Input (Kilowatts)

Note:

1. Cooling capacities are based on 80°/67°F Evaporating air temperarture and 95° Condensing air temperature.
2. Direct interpolation is permissible – Do not extrapolate.
3. Capacity in KW = (Btu/Hr/12000)*3.517.

UNIT ELECTRICAL DATA

| MODEL | POWER SUPPLY | VOLTAGE RANGE | | Condenser Fan Motor | | Compressor 1 | | Compressor 2 | | Evaporator Blower Motor | | MCA | MOCP |
|----------|-----------------|------------------|------|------------------------|----------|--------------|--------|--------------|---------|-------------------------------|------|-------|------|
| | (V-PH-HZ) | MIN. | MAX. | HP (kW) | FLA | RLA | LRA | RLA | LRA | HP | FLA | | |
| PNGF-076 | 230-3-60 | 207 | 253 | 1.0 (.73) | 2.39 | 21.2 | 123.0 | - | - | 1.5 | 5 | 33.9 | 50 |
| PNGF-090 | 230-3-60 | 207 | 253 | 2.2 (1.62) | 4.95 | 25.9 | 164.0 | - | - | 1.5 | 5 | 42.3 | 60 |
| PNGF-130 | 230-3-60 | 207 | 253 | 2.2 (1.62) | 4.95 | 33.6 | 225.0 | - | - | 2.0 | 5.5 | 52.5 | 80 |
| PNGF-150 | 230-3-60 | 207 | 253 | 1.0 (.73)x2 | 2.39 x 2 | 21.2 | 123.0 | 21.2 | 123.0 | 3.0 | 8.1 | 60.6 | 80 |
| PNGF-180 | 230-3-60 | 207 | 253 | 1.0 (.73)x2 | 2.39 x 2 | 25.9 | 164.0 | 25.9 | 164.0 | 3.0 | 8.1 | 71.2 | 90 |
| PNGF-240 | 230-3-60 | 207 | 253 | 2.2 (1.62)x2 | 4.95 x 2 | 30.7 | 191.0 | 33.6 | 225.0 | 5.0 | 13.8 | 96.4 | 125 |
| PNGF-270 | 230-3-60 | 207 | 253 | 2.2 (1.62)x2 | 4.95 x 2 | 33.6 | 225.0 | 37.1 | 239.0 | 5.0 | 13.8 | 103.7 | 125 |
| PNGF-300 | 230-3-60 | 207 | 253 | 2.2 (1.62)x2 | 4.95 x 2 | 37.1 | 239.0 | 37.1 | 239.0 | 5.0 | 13.8 | 107.2 | 125 |
| PNGF-360 | 230-3-60 | 207 | 253 | 2.7 (2.0)x2 | 6.5 x 2 | 57.1 | 300.0 | 57.1 | 300.0 | 7.5 | 18.4 | 160.0 | 200 |
| PNGF-420 | 230-3-60 | 207 | 253 | 2.2 (1.62)x4 | 4.95 x 4 | 27.9 x 2 | 164x 2 | 30.7 x 2 | 191 x 2 | 7.5 | 18.4 | 163.0 | 175 |
| PNGF-480 | 230-3-60 | 207 | 253 | 2.2 (1.62)x4 | 4.95 x 4 | 30.7 | 191.0 | 33.6 x 3 | 225 x 3 | 7.5 | 18.4 | 178.0 | 200 |

LEGEND:

FLA - Full Load Amps
 HP - Horse Power
 LRA - Locked Rotor Amps

RLA - Rated Load Amps
 MCA - Minimum Circuit Amps
 MOCP - Maximum Over Current Protection

UNIT ELECTRICAL DATA

| MODEL | POWER SUPPLY | VOLTAGE RANGE | | Condenser Fan Motor | | Compressor 1 | | Compressor 2 | | Evaporator Blower Motor | | MCA | MOCP |
|----------|-----------------|------------------|------|------------------------|----------|--------------|--------|--------------|-----------|-------------------------------|------|-------|------|
| | (V-PH-HZ) | MIN. | MAX. | HP (KW) | FLA | RLA | LRA | RLA | LRA | HP | FLA | | |
| PNGF-076 | 380-3-60 | 342 | 418 | 1.0 (.73) | 1.38 | 11.9 | 78.0 | - | - | 1.0 | 2.4 | 18.7 | 30 |
| PNGF-090 | 380-3-60 | 342 | 418 | 2.2 (1.62) | 2.85 | 13.6 | 73.0 | - | - | 1.5 | 2.8 | 22.7 | 35 |
| PNGF-130 | 380-3-60 | 342 | 418 | 2.2 (1.62) | 2.85 | 21.4 | 140.0 | - | - | 2.0 | 3.8 | 33.4 | 50 |
| PNGF-150 | 380-3-60 | 342 | 418 | 1.0 (.73) x 2 | 1.38 x 2 | 11.9 | 78.0 | 11.9 | 78.0 | 3.0 | 5.0 | 34.5 | 45 |
| PNGF-180 | 380-3-60 | 342 | 418 | 1.0 (.73) x 2 | 1.38 x 2 | 13.9 | 94.3 | 13.9 | 94.3 | 3.0 | 5.0 | 39.0 | 50 |
| PNGF-240 | 380-3-60 | 342 | 418 | 2.2(1.62) x 2 | 2.85 x 2 | 17.2 | 123.0 | 21.4 | 140.0 | 5.0 | 8.7 | 58.4 | 70 |
| PNGF-270 | 380-3-60 | 342 | 418 | 2.2(1.62) x 2 | 2.85 x 2 | 21.4 | 140.0 | 26.4 | 145.0 | 5.0 | 8.7 | 68.8 | 90 |
| PNGF-300 | 380-3-60 | 342 | 418 | 2.2(1.62) x 2 | 2.85 x 2 | 26.4 | 145.0 | 26.4 | 145.0 | 5.0 | 8.7 | 73.8 | 100 |
| PNGF-360 | 380-3-60 | 342 | 418 | 2.7 (2.0) x 2 | 3.78 x 2 | 27.1 | 138.0 | 27.1 | 138 | 7.5 | 10.6 | 79.1 | 100 |
| PNGF-420 | 380-3-60 | 342 | 418 | 2.2(1.62) x 4 | 2.85 x 4 | 15.5 x 2 | 94.3x2 | 17.2 x 2 | 123.0 x 2 | 7.5 | 10.6 | 91.7 | 100 |
| PNGF-480 | 380-3-60 | 342 | 418 | 2.2(1.62) x 4 | 2.85 x 4 | 17.2 | 123.0 | 21.4 x 3 | 140.0 x 3 | 10.0 | 15.1 | 113.3 | 125 |

LEGEND:

FLA - Full Load Amps
 HP - Horse Power
 LRA - Locked Rotor Amps

RLA - Rated Load Amps
 MCA - Minimum Circuit Amps
 MOCP - Maximum Over Current Protection

FAN PERFORMANCE

| Model | CFM | External Static Pressure [in.wg] | | | | | | | | | | | | | | | | | |
|----------|------|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 0.30 | | 0.50 | | 0.70 | | 1.00 | | 1.20 | | 1.40 | | 1.60 | | 1.80 | | 2.00 | |
| | | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP |
| PNGF-076 | 2200 | 810 | 0.60 | 886 | 0.70 | 959 | 0.80 | 1066 | 0.99 | - | - | - | - | - | - | - | - | - | - |
| | 2400 | 814 | 0.67 | 887 | 0.78 | 957 | 0.90 | 1058 | 1.07 | 1123 | 1.21 | 1187 | 1.34 | 1251 | 1.50 | - | - | - | - |
| | 2600 | 821 | 0.76 | 891 | 0.87 | 958 | 0.99 | 1055 | 1.17 | 1117 | 1.30 | 1178 | 1.43 | 1237 | 1.58 | 1297 | 1.74 | 1355 | 1.90 |
| PNGF-090 | 2300 | 812 | 0.63 | 886 | 0.74 | 958 | 0.84 | 1061 | 1.03 | 1128 | 1.17 | 1194 | 1.31 | - | - | - | - | - | - |
| | 2600 | 821 | 0.76 | 891 | 0.87 | 958 | 0.99 | 1055 | 1.17 | 1117 | 1.30 | 1178 | 1.43 | 1237 | 1.58 | 1297 | 1.74 | 1355 | 1.90 |
| | 2900 | 833 | 0.91 | 901 | 1.03 | 965 | 1.15 | 1057 | 1.34 | 1115 | 1.47 | 1172 | 1.61 | 1228 | 1.76 | 1283 | 1.90 | 1337 | 2.06 |
| PNGF-130 | 3200 | 676 | 0.84 | 738 | 0.99 | 798 | 1.15 | 885 | 1.42 | - | - | - | - | - | - | - | - | - | - |
| | 3600 | 713 | 1.06 | 770 | 1.22 | 826 | 1.39 | 906 | 1.66 | 957 | 1.86 | 1008 | 2.06 | - | - | - | - | - | - |
| | 4000 | 721 | 1.22 | 776 | 1.41 | 829 | 1.58 | 905 | 1.86 | 853 | 2.05 | 1001 | 2.27 | 1048 | 2.48 | 1094 | 2.71 | 1139 | 2.94 |
| PNGF-150 | 3900 | 718 | 1.19 | 774 | 1.35 | 828 | 1.53 | 904 | 1.81 | 954 | 2.00 | 1002 | 2.21 | 1050 | 2.43 | 1096 | 2.65 | - | - |
| | 4300 | 728 | 1.39 | 782 | 1.57 | 834 | 1.74 | 907 | 2.02 | 954 | 2.23 | 1000 | 2.44 | 1045 | 2.65 | 1089 | 2.87 | 1132 | 3.11 |
| | 4700 | 740 | 1.61 | 792 | 1.80 | 842 | 1.90 | 913 | 2.29 | 958 | 2.49 | 1002 | 2.71 | 1045 | 2.92 | 1087 | 3.15 | 1128 | 3.38 |
| PNGF-180 | 4600 | 892 | 1.47 | 968 | 1.70 | 1042 | 1.96 | 1149 | 2.36 | 1220 | 2.65 | 1289 | 2.99 | 1357 | 3.34 | 1426 | 3.73 | 1494 | 4.17 |
| | 5100 | 898 | 1.70 | 970 | 1.94 | 1040 | 2.20 | 1141 | 2.60 | 1206 | 2.88 | 1270 | 3.19 | 1334 | 3.53 | 1396 | 3.87 | 1459 | 4.25 |
| | 5600 | 907 | 1.97 | 977 | 2.23 | 1044 | 2.49 | 1139 | 2.90 | 1201 | 3.19 | 1262 | 3.49 | 1321 | 3.81 | 1380 | 4.14 | 1438 | 4.49 |
| PNGF-240 | 6500 | 929 | 2.53 | 995 | 2.82 | 1058 | 3.11 | 1148 | 3.55 | 1205 | 3.86 | 1261 | 4.17 | 1316 | 4.49 | 1369 | 3.60 | 1422 | 5.16 |
| | 7000 | 944 | 2.88 | 1008 | 3.19 | 1069 | 3.51 | 1156 | 3.98 | 1212 | 4.30 | 1266 | 4.62 | 1319 | 4.96 | 1371 | 5.29 | 1421 | 5.64 |
| | 7500 | 960 | 3.27 | 1022 | 3.61 | 1082 | 3.94 | 1167 | 4.45 | 1221 | 4.79 | 1274 | 5.12 | 1325 | 5.47 | 1375 | 5.82 | 1424 | 6.18 |
| PNGF-270 | 7400 | 750 | 2.37 | 810 | 2.72 | 867 | 3.08 | 950 | 3.67 | 1003 | 4.10 | 1056 | 4.54 | 1108 | 5.01 | 1159 | 5.51 | - | - |
| | 7900 | 755 | 2.61 | 814 | 2.98 | 870 | 3.35 | 950 | 3.94 | 1001 | 4.37 | 1052 | 4.80 | 1101 | 5.27 | 1150 | 5.75 | 1198 | 6.26 |
| | 8400 | 762 | 2.87 | 819 | 3.24 | 874 | 3.63 | 951 | 4.24 | 1001 | 4.66 | 1050 | 5.11 | 1098 | 5.56 | 1144 | 6.05 | 1191 | 6.55 |

LEGEND:

RPM : Fan Speed in revolution per minute
 BHP : Fan absorbed power

Note:

- Internal Static pressure is based on pressure drops through evaporator coil, fan casing and 2" washable filters.
- Blue shaded area indicates the operating range of a standard motor and drive combination.
- Green shaded area indicates the operating range of a standard motor with non standard drive combination.
- Gray shaded area indicates operating range using non standard motor and drive combination.
- To determine the power of motor to be installed, just multiply the value of the absorbed power indicated above by 1.2.

FAN PERFORMANCE

| Model | CFM | External Static Pressure [in.wg] | | | | | | | | | | | | | | | | | |
|----------|-------|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|-------|
| | | 0.30 | | 0.50 | | 0.70 | | 1.00 | | 1.20 | | 1.40 | | 1.60 | | 1.80 | | 2.00 | |
| | | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP | RPM | BHP |
| PNGF-300 | 8200 | 759 | 2.76 | 817 | 3.14 | 872 | 3.51 | 951 | 4.12 | 1001 | 4.54 | 1050 | 4.99 | 1099 | 5.44 | 1146 | 5.92 | 1193 | 6.43 |
| | 8800 | 768 | 3.10 | 824 | 3.49 | 877 | 3.87 | 954 | 4.49 | 1003 | 4.93 | 1050 | 5.38 | 1097 | 5.83 | 1142 | 6.31 | 1187 | 6.84 |
| | 9400 | 777 | 3.47 | 832 | 3.87 | 884 | 4.28 | 959 | 4.92 | 1006 | 5.36 | 1052 | 5.82 | 1097 | 6.29 | 1141 | 6.77 | 1185 | 7.27 |
| PNGF-360 | 9600 | 780 | 3.61 | 835 | 4.01 | 887 | 4.42 | 961 | 5.07 | 1008 | 5.51 | 1054 | 5.97 | 1098 | 6.45 | 1142 | 6.93 | 1184 | 7.44 |
| | 10200 | 791 | 4.02 | 844 | 4.44 | 895 | 4.88 | 968 | 5.55 | 1014 | 6.01 | 1058 | 6.47 | 1102 | 6.96 | 1144 | 7.45 | 1185 | 7.96 |
| | 10800 | 802 | 4.48 | 854 | 4.92 | 904 | 5.38 | 975 | 6.06 | 1020 | 6.54 | 1064 | 7.02 | 1107 | 7.52 | 1148 | 8.03 | 1188 | 8.54 |
| PNGF-420 | 11000 | 642 | 3.81 | 690 | 4.33 | 735 | 4.88 | 802 | 5.76 | 846 | 6.41 | 889 | 7.09 | 931 | 7.82 | 974 | 8.59 | 1016 | 9.42 |
| | 11600 | 649 | 4.14 | 695 | 4.68 | 739 | 5.23 | 804 | 6.11 | 845 | 6.76 | 887 | 7.43 | 928 | 8.14 | 968 | 8.90 | 1009 | 9.69 |
| | 12200 | 656 | 4.50 | 701 | 5.05 | 744 | 5.62 | 806 | 6.51 | 847 | 7.14 | 887 | 7.82 | 926 | 8.53 | 965 | 9.26 | 1004 | 10.04 |
| PNGF-480 | 12400 | 658 | 4.64 | 703 | 5.19 | 746 | 5.75 | 808 | 6.65 | 848 | 7.29 | 887 | 7.96 | 926 | 8.66 | 964 | 9.40 | 1003 | 10.17 |
| | 13100 | 667 | 5.11 | 711 | 5.67 | 753 | 6.26 | 813 | 7.17 | 851 | 7.82 | 889 | 8.49 | 927 | 9.18 | 964 | 9.92 | 1000 | 10.68 |
| | 13800 | 677 | 5.62 | 720 | 6.21 | 760 | 6.81 | 819 | 7.75 | 857 | 8.39 | 893 | 9.06 | 930 | 9.77 | 965 | 10.50 | 1000 | 11.26 |

LEGEND:

RPM : Fan Speed in revolution per minute


BHP : Fan absorbed power

Note:


- Internal Static pressure is based on pressure drops through evaporator coil, fan casing and 2" washable filters.
- Blue shaded area indicates the operating range of a standard motor and drive combination.
- Green shaded area indicates the operating range of a standard motor with non standard drive combination.
- Gray shaded area indicates operating range using non standard motor and drive combination.
- To determine the power of motor to be installed, just multiply the value of the absorbed power indicated above by 1.2.

UNIT DIMENSIONS


PNGF-076A9
ALL DIMENSIONS ARE IN MM

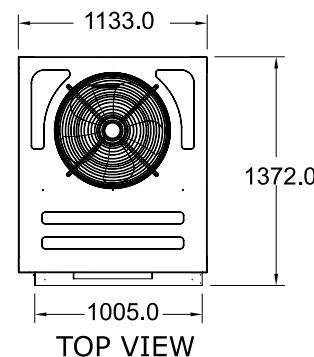

TOP VIEW

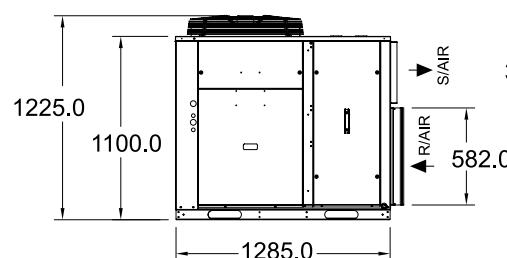


SIDE VIEW

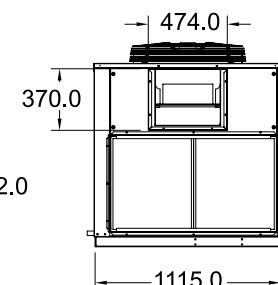


FRONT VIEW


PNGF-090A9
ALL DIMENSIONS ARE IN MM

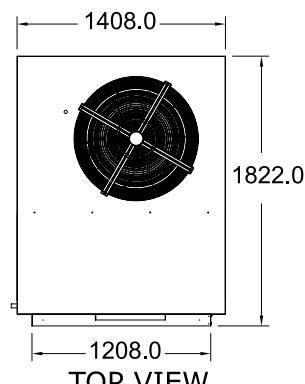

TOP VIEW

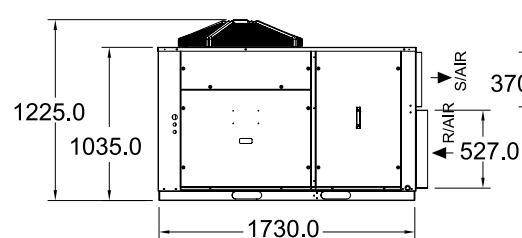


SIDE VIEW

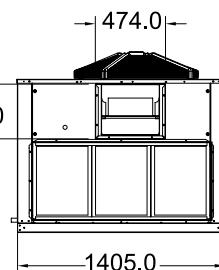


FRONT VIEW

UNIT DIMENSIONS


PNGF-130A9
ALL DIMENSIONS ARE IN MM

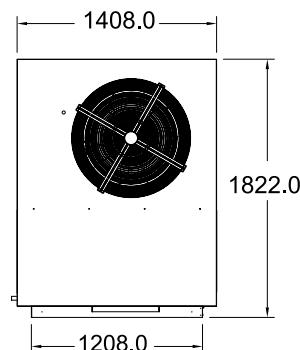

TOP VIEW

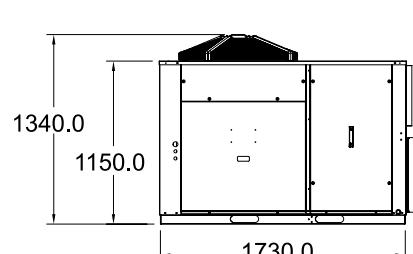


SIDE VIEW

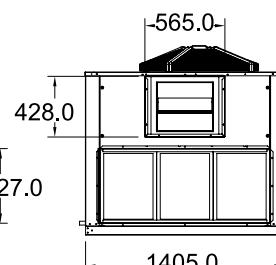


FRONT VIEW


PNGF-150A9
ALL DIMENSIONS ARE IN MM

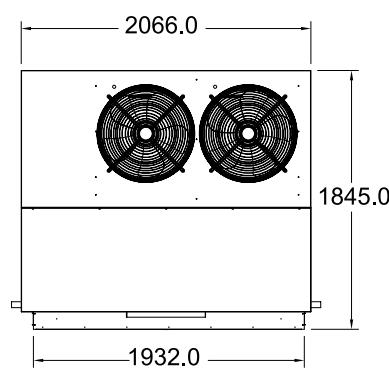

TOP VIEW

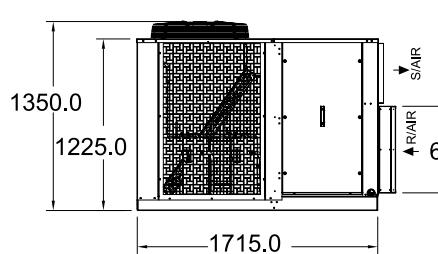




SIDE VIEW

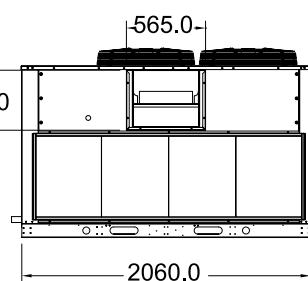




FRONT VIEW

UNIT DIMENSIONS

PNGF-180A9
ALL DIMENSIONS ARE IN MM

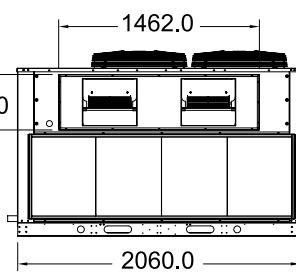
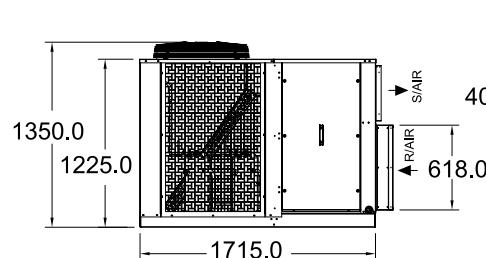
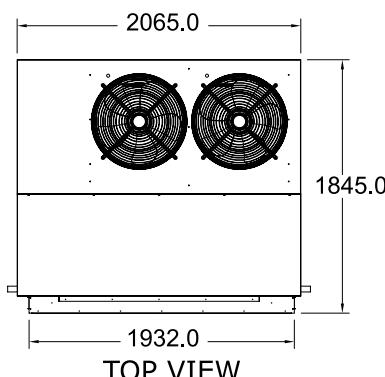


PNGF-240A9
ALL DIMENSIONS ARE IN MM

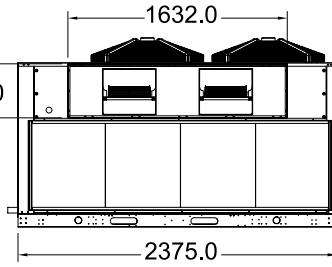
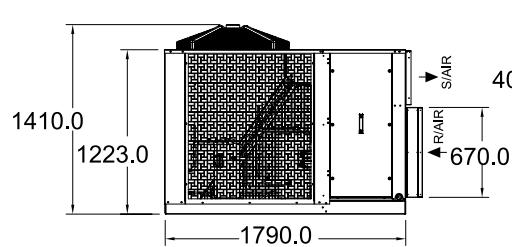
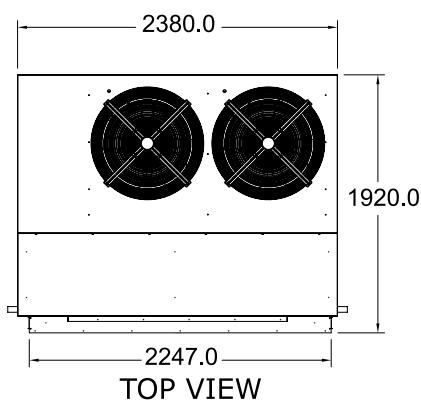


UNIT DIMENSIONS

PNGF-270A9
ALL DIMENSIONS ARE IN MM

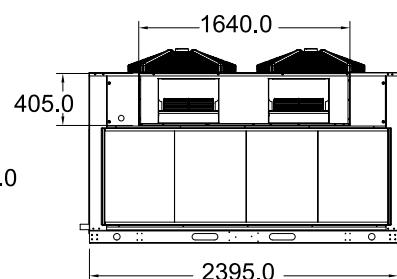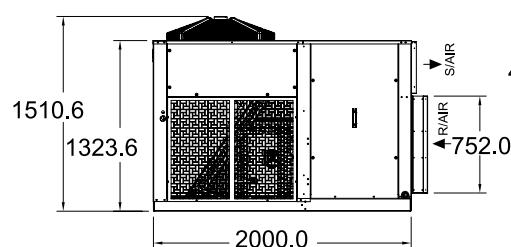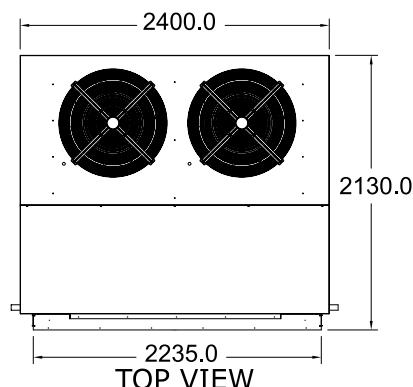


PNGF-300A9
ALL DIMENSIONS ARE IN MM

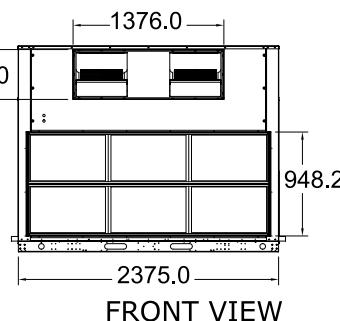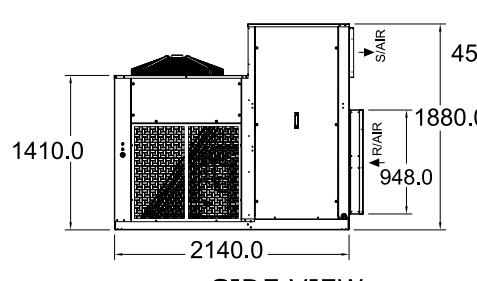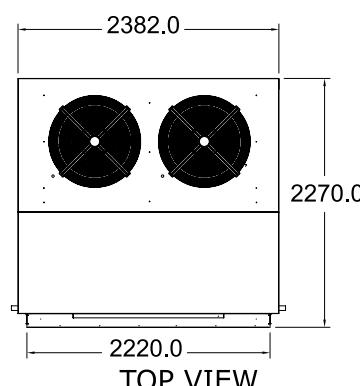


UNIT DIMENSIONS

PNGF-360A9


ALL DIMENSIONS ARE IN MM

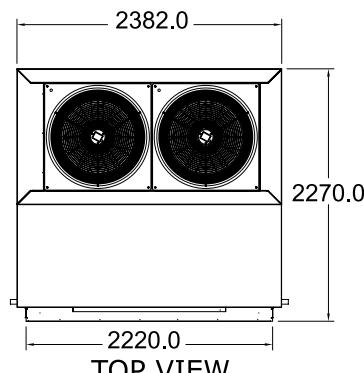


TOP VIEW

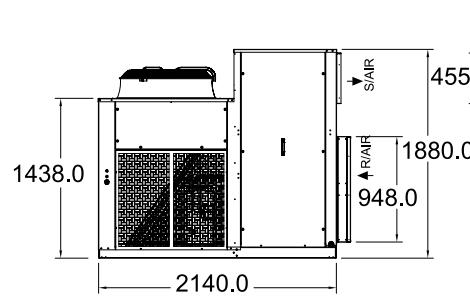


SIDE VIEW

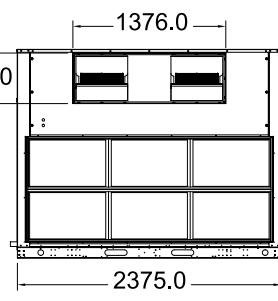

FRONT VIEW

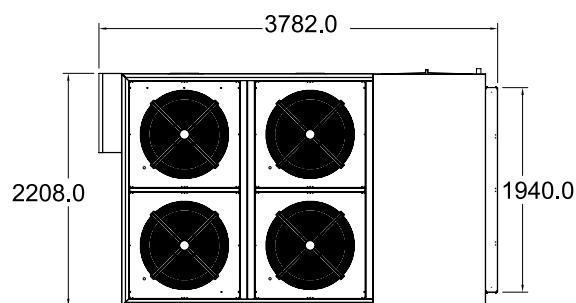


TOP VIEW

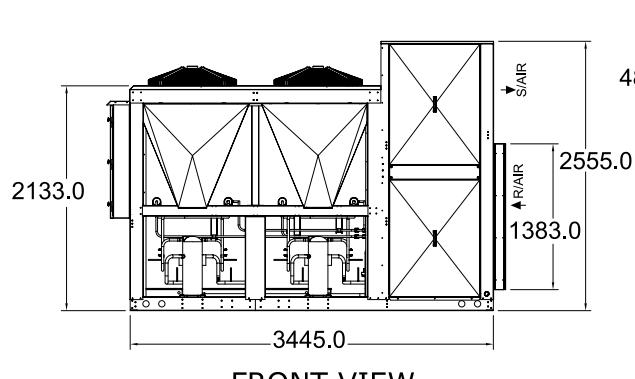

FRONT VIEW


PNGF-420A9/480A9

ALL DIMENSIONS ARE IN MM

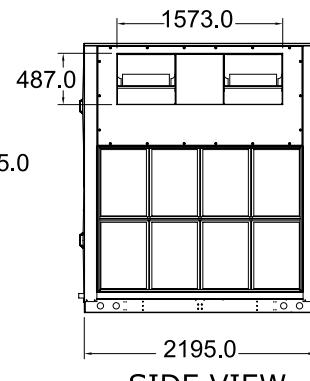


SIDE VIEW

LOAD DISTRIBUTION

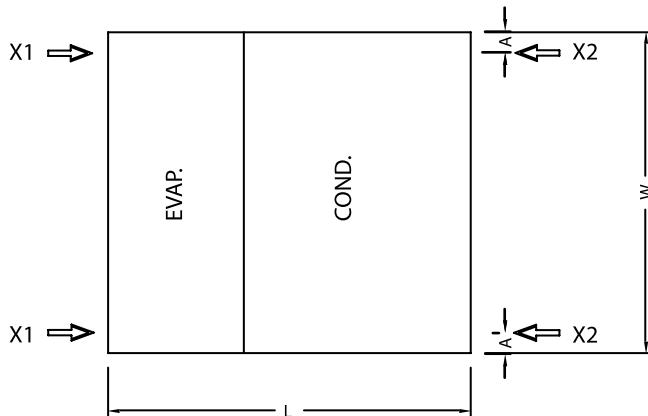


| | LOAD DISTRIBUTION (kg) | | | | | Total Weight |
|----------|------------------------|--------|--------|---------|---------|--------------|
| MODEL | L (mm) | W (mm) | A (mm) | X1 (kg) | X2 (kg) | |
| PNGF-076 | 1285 | 1115 | 75 | 55 | 61 | 232 |
| PNGF-090 | 1730 | 1405 | 75 | 71 | 79 | 300 |
| PNGF-130 | 1730 | 1405 | 75 | 97 | 108 | 410 |

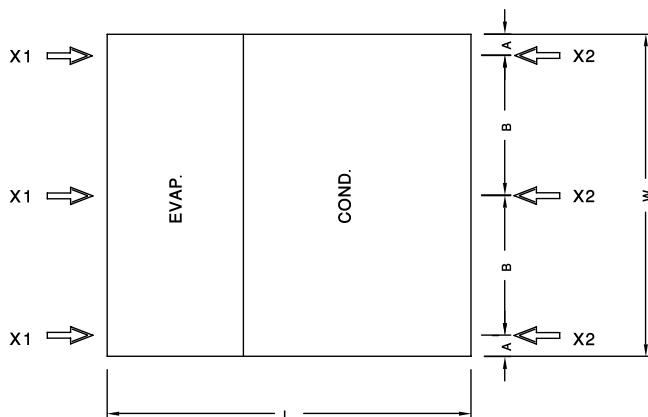

| | LOAD DISTRIBUTION (kg) | | | | | | Total Weight |
|----------|------------------------|--------|--------|--------|---------|---------|--------------|
| MODEL | L (mm) | W (mm) | A (mm) | B (mm) | X1 (kg) | X2 (kg) | |
| PNGF-150 | 1715 | 2060 | 125 | 980 | 97 | 107 | 610 |
| PNGF-180 | 1715 | 2060 | 125 | 980 | 104 | 115 | 657 |
| PNGF-240 | 1790 | 2375 | 125 | 1075 | 128 | 142 | 810 |
| PNGF-270 | 2000 | 2395 | 125 | 1075 | 160 | 176 | 1008 |
| PNGF-300 | 2140 | 2375 | 125 | 1075 | 170 | 188 | 1074 |
| PNGF-360 | 2140 | 2375 | 125 | 1005 | 219 | 242 | 1383 |
| PNGF-420 | 3445 | 2195 | 125 | 1005 | 247 | 273 | 1560 |
| PNGF-480 | 3445 | 2195 | 125 | 1005 | 264 | 292 | 1668 |


TYPICAL WIRING DIAGRAM

230V - 3PH - 60Hz

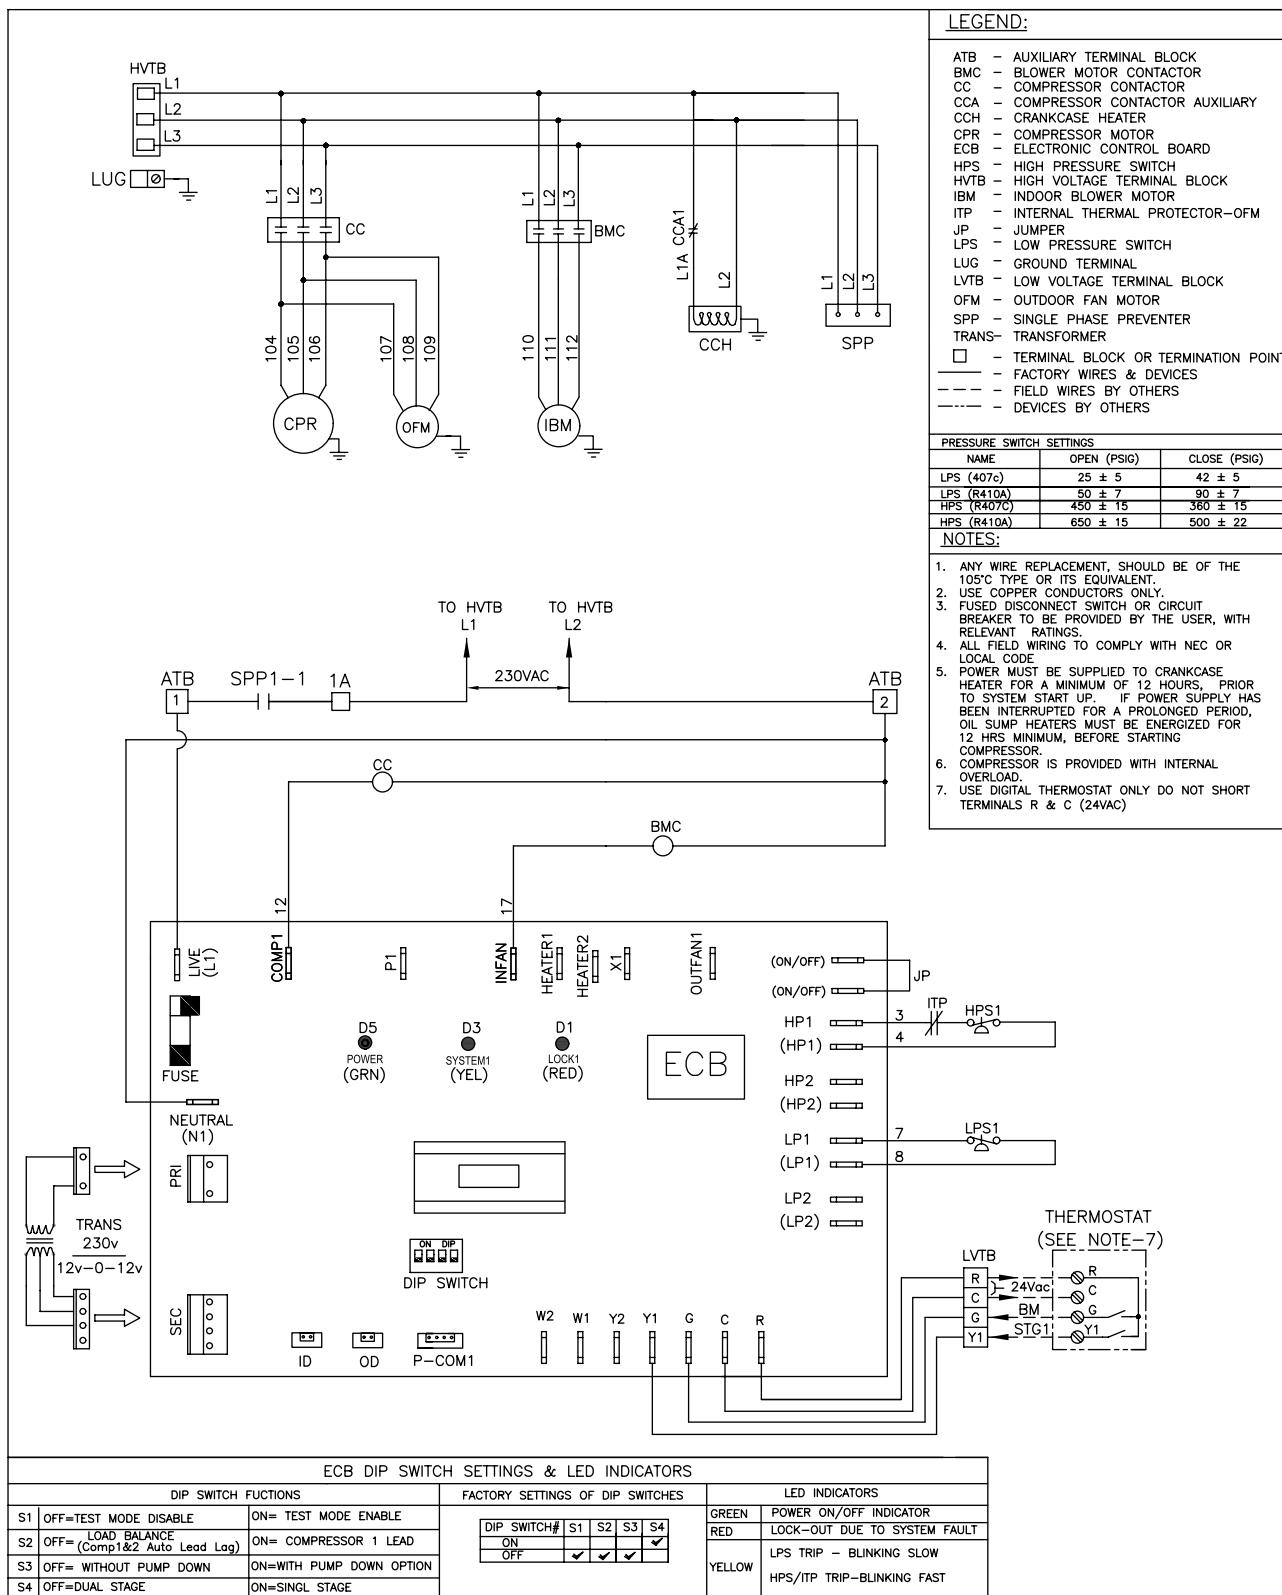

TYPICAL WIRING DIAGRAM

380/400V - 3PH - 60Hz

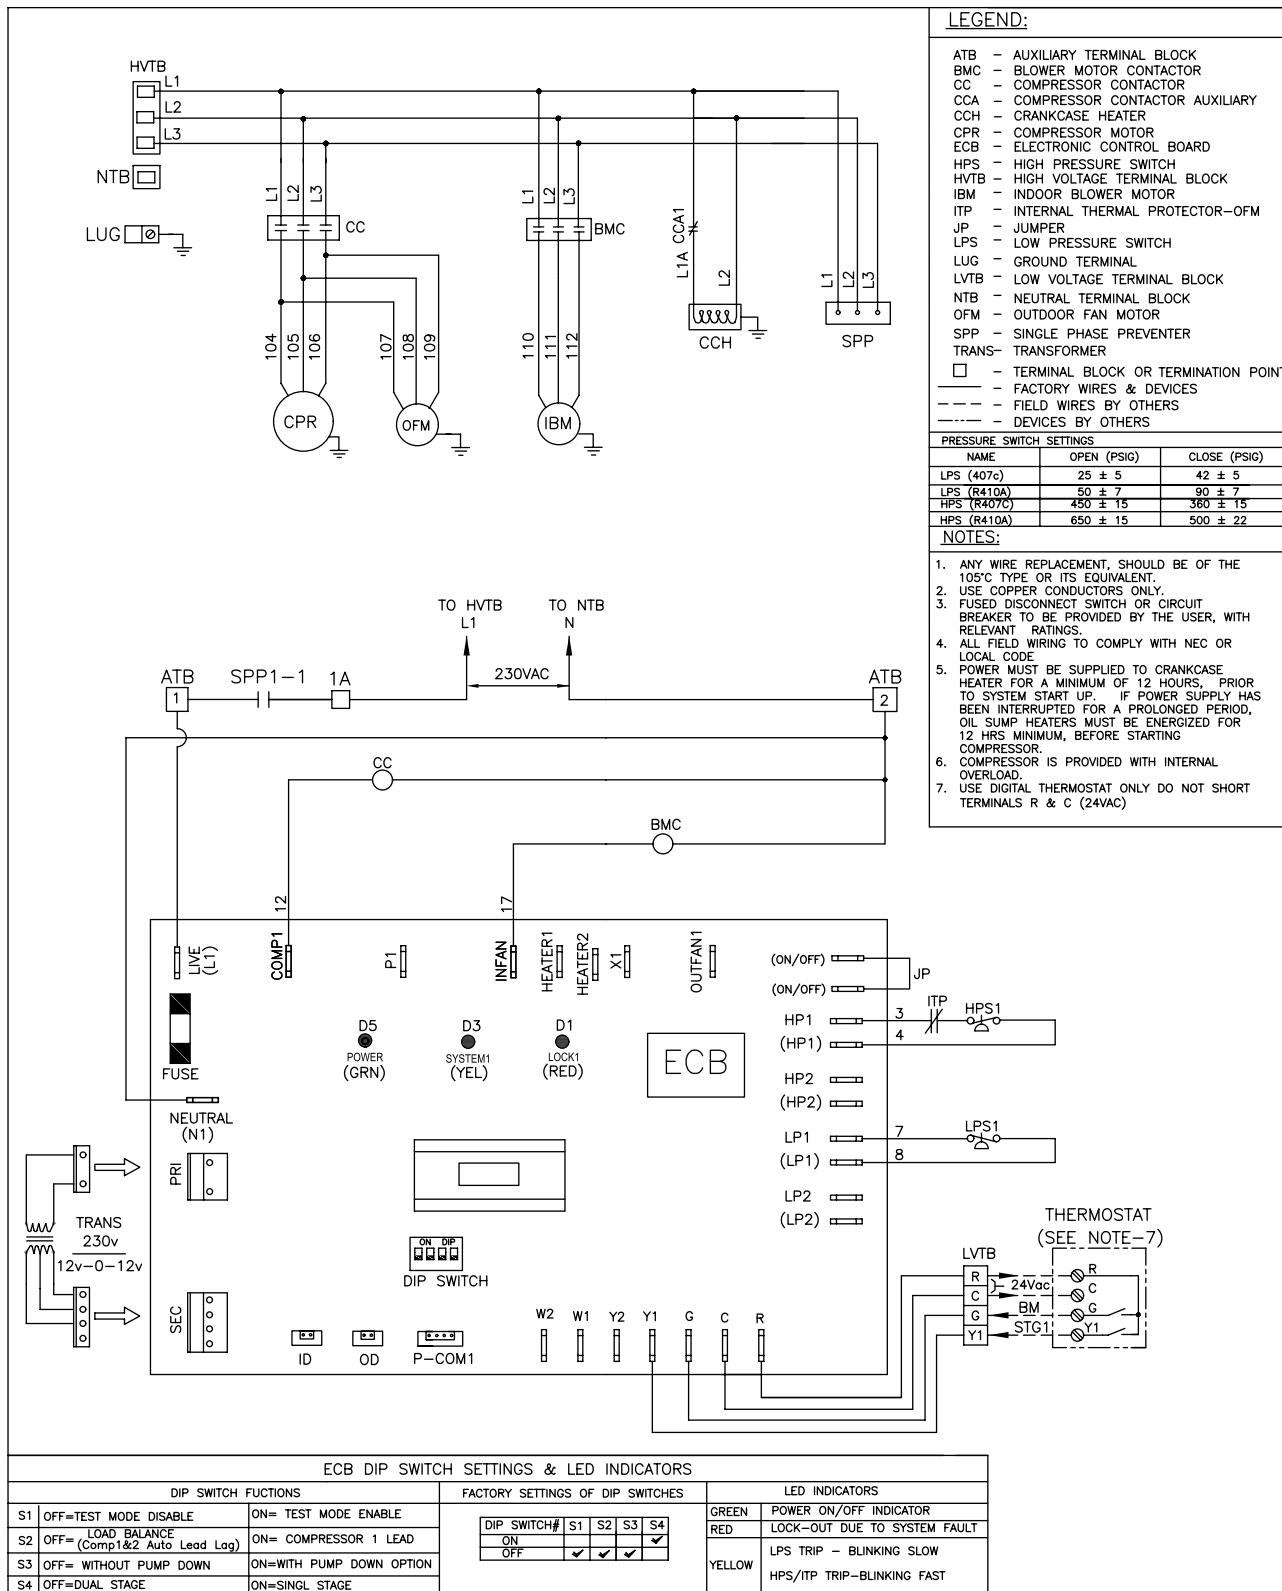

COOLEX

NOTES

About RIC

Refrigeration Industries Company (KSE 504) is a group holding company with diversified interests in manufacturing, contracting and services. Recognized regionally for our engineering capabilities and management excellence, RIC and its subsidiaries offer a wide range of high quality products and services that cater to both residential and commercial customers, in the areas of climate control technologies and specialized storage solutions.

In view of the growing Kuwait infrastructure and the limitations imposed on it by the country's arid climate, the Refrigeration Industries Company was established 43 years ago in 1973, by Amiri Decree. The company's operations began with the construction of the first cold stores in the region, to enable the storage of the imported foods, on which Kuwait relied. Along with the development and advancement of the country, so has RIC prospered and expanded, and is now a milestone in the history of modern Kuwait.

RIC takes pride in its successful record and the many accolades it has garnered over time, but the greatest achievement has been the provision of comfort and protection from the harsh climate, to the people of Kuwait.

More than 43 years of uninterrupted service, overcoming extreme weather conditions, war, economic recessions and ever increasing competition, is testimony to the fact that RIC has met the expectations and responsibilities that was envisioned at the beginning and also highlights the tenacity and vision to exceed them in the future.

Facts throughout the years

1973 Warehouses were established by Amiri Decree.

1979 RIC Constructed the Medical Cold Stores Complex, the world's largest at that time.

1980 RIC Air Conditioning manufacturing plant set up in Sulaibya.

1981 Production of Package & Mini-Split A/Cs started under York-Gulf.

1984 RIC was listed in Kuwait Stock Exchange.

1986 COOLEX brand Production Launched.

1991 RIC rebuilt the manufacturing plant destroyed during the war.

1997 Achieved ISO Certification ISO 9001:1994.

2002 ETL Designed testing lab became fully operational.

2004 Privatization of RIC.

2010 COOLEX becomes the first A/C Unit to Pass MEW's new regulations.

2010 RIC Factory Renovation and Expansion into neighboring countries.

2012 Achieved UL & AHRI Certification for Coolex Units.

2014 Achieved SASO Certification for Concealed Ducted Split Series.

2014 Achieved EUROVENT Certification for Air Handling Units AHU.

2014 Achieved UL Certification for Air Cooled Chillers.

2015 Achieved ISO 17025 Certification for Psychrometric Laboratory.

2016 Achieved Energy Efficiency Certification for Concealed Ducted Split Series & Rooftop Package units (Kingdom of Bahrain).

نبذة عن الشركة

شركة صناعات التبريد (متداولة في سوق الكويت للأوراق المالية برقم 504) هي شركة متعددة الأنشطة تعمل في مجال التصنيع والمقاولات والخدمات. ونحن نقدم مجموعة كبيرة من المنتجات والخدمات والحلول التقنية في مجال مواجهة الظروف المناخية وحلول التخزين. وقد حازت الشركة على إعتراف إقليمي بقدراتها الهندسية وكفاءتها الإدارية.

شركة صناعات التبريد هي مجموعة شركات تهدف إلى توفير أعلى مستويات الجودة من حيث المنتجات والخدمات التي تلبى احتياجات عملائها السكنية والتجارية. وعلى مدى ثلاثة وأربعين عاماً مضت على إنشاء شركتنا فقد إستطعنا أن نوطد أقدامنا في جميع قطاعات السوق الكويتي. ونحن إذ نفتخر بالإنجازات التي حققناها، إلا أنها أشد فخراً بأننا نتمكننا من الوقوف إلى جانب أهل الكويت على مدى سنوات طولية في مواجهة تقلبات الظروف المناخية القاسية سواء من حيث درجات الحرارة العالية أو الأتربة أو الرطوبة.

وباعتبارها إحدى الشركات الصناعية العاملة في دولة الكويت، فقد واجهت الشركة تحديات وأمال كبيرة في سعيها لتحقيق النجاح، وقد كانت الشركة - ولا تزال - معلماً من المعالم المهمة في نظر أهل الكويت لما قدمته من منتجات وخدمات إستطاعت أن تغير الطبيعة القاسية لمناخ الكويت. وبعد نحو 43 عاماً تقريباً، لا يزال السؤال مطروحاً حول تحقيقنا لهذه التوقعات، فهل إستطاعت الشركة أن تتحمل مسؤولياتها علىوجه الأكمل؟ وبأي ال رد بالإيجاب، فعلى مدى ثلاثة وأربعين عاماً تقريباً لم تتوقف الشركة خلالها عن الإستمرار في تقديم خدماتها وأعمالها رغم الصعوبات التي تمثلت في ظروف الطقس القاسية أو الحروب أو الكساد الاقتصادي أو إرتفاع حدة المنافسة، فقد كانت كل واحدة من هذه الظروف بمثابة شهادة على أنها حققنا ما وعدنا به وما عدنا العزم على تففيذه.

حقائق وتاريخ

1973 تم إنشاء المستودعات بناء على مرسوم أميري.

1979 عهدت وزارة الصحة الكويتية لشركة صناعات التبريد بإنشاء مجمع مستودعات مخازن التبريد الطبية، وقد كان هذا المجمع حينها هو الأضخم من نوعه على مستوى العالم، وقد وصلت تكلفته إلى 12,000,000 دينار كويتي.

1980 تم إنشاء مصنع مكيفات الهواء التابع لشركة صناعات التبريد في الصليبية.

1981 بدء إنتاج أجهزة التكييف المدمجة والمنفصلة الصغيرة تحت علامة York-Gulf.

1984 تم قيد شركة صناعات التبريد في سوق الكويت للأوراق المالية.

1986 بدء إنتاج مكيفات علامة كولكس.

1991 قامت شركة صناعات التبريد بإعادة بناء مصنعها الذي دمرته الحرب.

1997 الحصول على شهادة الأيزو 9001:1994.

2002 بدء تشغيل مختبر فحص وحدات التكييف (ETL) خخصصة شركة صناعات التبريد.

2004 2010 كانت وحدات كولكس أول وحدات تكييف هواء تجتاز اللوائح التي أقرتها (وزارة الكهرباء والماء).

2010 تم تجديد مصنع شركة صناعات التبريد وبدء التوسيع والتصدير إلى الدول المجاورة.

2012 الحصول على شهادة UL و لأجهزة التكييف كولكس.

2014 الحصول على شهادة SASO لأجهزة التكييف المنفصلة.

2014 الحصول على شهادة EUROVENT لأجهزة مناولة الهواء.

2014 الحصول على شهادة UL لمبردات الهواء الشيلر.

2015 الحصول على شهادة ISO 17025 لختبر السيكرومترية.

2016 الحصول على شهادة الطاقة لأجهزة التكييف المنفصلة والوحدات المدمجة (مملكة البحرين).

COOLEX DISTRIBUTORS

Sultanate of Oman

Al Noor Projects Engineering & Trading Company

Address : Third Floor, Oman House
 P.O. Box: 1047, P.C: 114 Hay Al Mina - Muscat
 Tel : +968 24709402/403
 Fax : +968 24709401
 Email : info@alnoorprojects.com
 Email : gm@alnoorprojects.com
 Website : www.alnoorprojects.com

United Arab Emirates UAE

Obaid Humaid Al-Tayer Engineering Division

Al Tayer Group
 Address : Dubai – UAE, PO Box 2623
 Tel : +971 4 2011272
 Fax : +971 4 2825008
 Mobile : +971 50 3500747
 Email : bkrishnan@altayer-eng.com
 Website : www.altayer.com

Kingdom of Bahrain

Y.K. Almoayyed & Sons

Address : EHAD – Project Department, Sehla Workshop
 P.O. Box 143, Manama, Kingdom of Bahrain
 Tel : +973 17 400 444, Extn. 205
 Direct : +973 17 405 250
 Fax : +973 17 400 388
 Email : Pradeep@almoayyed.com.bh
 Email : anshul.bawa@almoayyed.com.bh
 Website : www.almoayyed.com

Kingdom of Saudi Arabia KSA

Al-Etmad for Refrigeration and Air Conditioning Industries Company

Address : Al Qortobah Quartier, King Abdullah Road
 Riyadh – KSA, P.O. Box 50467 Riyadh 11533
 Tel : + 966 11 2447789
 Fax : + 966 11 4958812
 Mobile : + 966 560034240
 Email : abunaif722@ksacoolex.com
 Website : www.Coolex.com

Republic of Iraq

SWEER Company Limited

Address : Al Senak -Jumhuria Street - Baghdad-Iraq
 P.O. Box: 8095
 Tel : +964 1 8181196
 Mobile : +964 7705 884444
 Email : sweerco@yahoo.com
 Website : www.sweerco.com

State of Qatar

Al Jaber for air conditioning & Refrigeration industries

Address : PO.Box 23546 Doha
 Tel : +974 44210963
 Fax : +974 44448919
 Mobile : +974 55610321
 Mobile : +974 55843255
 Email : Customercare@jaric-qatar.com
 Website : www.jaric-qa.com

Iran

Capital ICEBERG Limited Company

Address : No. 31, 3rd Floor, Aghdasieyeh Trade Center
 Aghdasieyeh Street, Tehran – Iran
 Tel : +98 (021) 26110510
 Fax : +98 (021) 26110510
 Mobile : +98 912 119 2961
 Email : info@capitaliceberg.com
 Email : saeed.s@capitaliceberg.com
 Email : sara.s@capitaliceberg.com
 Website : www.capitaliceberg.com

Sudan

Abina For Advises And Engineering Work Company

Address : Katreana Street - East Qurashi Park
 Sudan – Khartoum
 Tel : +249 574064
 Fax : +249 574064
 Mobile : +249 900900246/247/248/249/250/251/252
 Email : maha123@yahoo.com

Islamic Republic of Pakistan

AG TEK Pvt. Ltd.

Address : 179-S, Imperial Garden Paragon City
 Lahore - Pakistan
 Tel : +92-42-37187640-43
 Fax : +92-42-37187644
 Cell : +92-300-4745624
 Mobile : +92-321-2280011
 Email : info@agtek.com.pk
 Email : coo@agtek.com.pk
 Website : www.agtek.com.pk

Egypt

Total Group Egypt Company

Address : 4 Buildings Al-Noor – Sheraton Housing
 Cairo – Egypt
 Tel : +202267240/837
 Mobile : +20109966627
 Mobile : +21201299444
 Email : adel@coolex-eg.com
 Email : ahmad@coolex-eg.com
 Website : www.coolex-eg.com

Syrian Arab Republic

Team for Engineering & Trading co.

Address : Damascus - Kafer Souseh
 P.O.Box: 16311
 Tel : +963 11 222 2996
 Tel-Fax : +963 11 222 1125
 Mobile : +963 93 322 6288
 Mobile : +963 94 421 1146
 Email : info@team-syr.net
 Email : georgeyoussef@team-syr.net
 Website : www.team-syr.net

Nepal

Global Air Conditioning And Trading Pvt Ltd

Address : SINAMANGAL-9, KATHMANDU-NEPAL
 Tel : +977 9813388560
 Email : ajay.sharma2852@gmail.com

Please contact Sales and Marketing Department

sales@ric.com.kw or www.coolex.com.kw for specific information on the current design and specifications. Ref no.: CPCF21-6-001

CENTRAL AIR CONDITIONING AND SPLIT UNIT

Coolex continuously works towards the improvement of its products. Hence, the design and specifications of the ordered product may vary without prior notice.

www.coolex.com.kw

